

Rejestrator DVR HWD-7100MH-G2 SERIA TURBO HD



Główne cechy

Video Input and Transmission

- Self-adaptive HDTVI/HDCVI/AHD/CVBS signal input
- Up to 4-ch 6 MP IP cameras input for HWD-7108MH-G2
- 8 MP/5 MP/4 MP HDTVI video input and live view for HWD-7108MH-G2, and 5 MP/4 MP for HWD-7104MH-G2
- Defogging function enabled for the supported analog cameras
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTVI signal

Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 8 MP resolution

Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for HWD-7108MH-G2

Storage and Playback

- 1 SATA interface (up to 8 TB capacity per HDD)
- 4/8-ch synchronous playback
- Smart search for efficient playback
- Supports the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback
- VQD (Video Quality Diagnostics)
- Supports PTZ control via Omnicast VMS of Genetec protocol

Network & Ethernet Access


- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface for HWD-7104MH-G2, and 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface for HWD-7108MH-G2
- Output bandwidth limit configurable



Specyfikacja

Model		HWD-7104MH-G2
Video/Audio input	Video compression	H.265+/H.265/H.264+/H.264
	Analog video input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
	HDTVl input	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
	AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
	HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30
	CVBS input	PAL/NTSC
	IP video input	2-ch
		Up to 6 MP resolution
		Supports H.265+/H.265/H.264+/H.264 IP cameras
	Audio compression	G.711u
Video/Audio output	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
	HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Encoding resolution	5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF
	Frame rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
		Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
	Video bit rate	32 Kbps to 10 Mbps
	Audio output	1-ch, RCA (Linear, 1 KΩ)
	Audio bit rate	64 Kbps
	Dual stream	Support
	Stream type	Video, Video & Audio
	Synchronous playback	4-ch
Network management	Remote connections	32
	Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Hard disk	SATA	1 SATA interface
	Capacity	Up to 8 TB capacity for each disk
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 st audio input)
	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface
	USB interface	2 × USB 2.0
General	Power supply	12 VDC
	Consumption (without HDD)	≤ 10 W
	Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
	Working humidity	10% to 90%
	Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)
	Weight (without HDD)	≤1 kg (2.2 lb)

Panel tylny na przykładzie 8-kan rejestratora

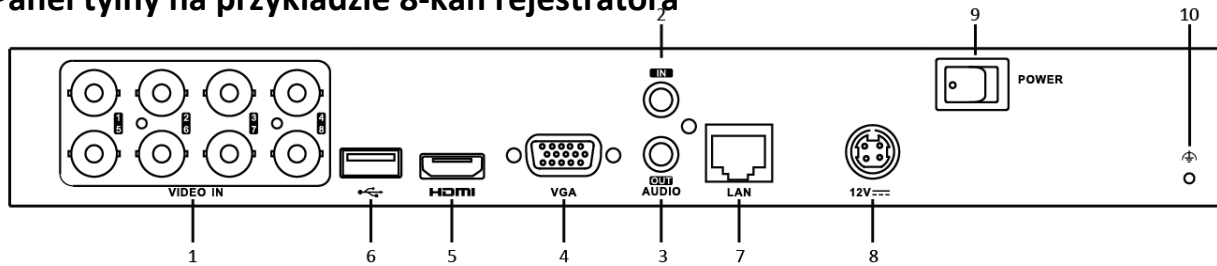

NOTE

The rear panel 4 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	6	USB Interface
2	AUDIO IN	7	Network Interface
3	AUDIO OUT	8	Power Supply
4	VGA	9	Power Switch
5	HDMI	10	GND

Dystrybutor:

IVEL Electronics Sp.z o.o. Sp.k.
42-216 Częstochowa
ul. Iglasta 2/4/3
Tel. 34 341 16 30
ivel@ivel.pl <https://ivel.pl>

HIKVISION[®] HiWatch Series

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com